

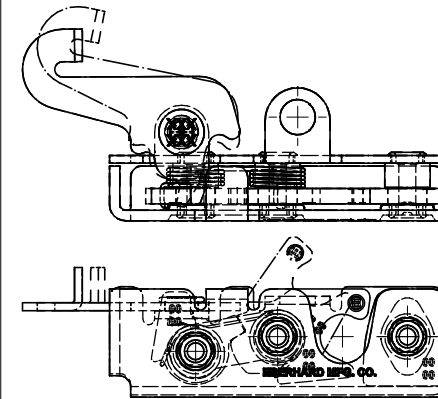
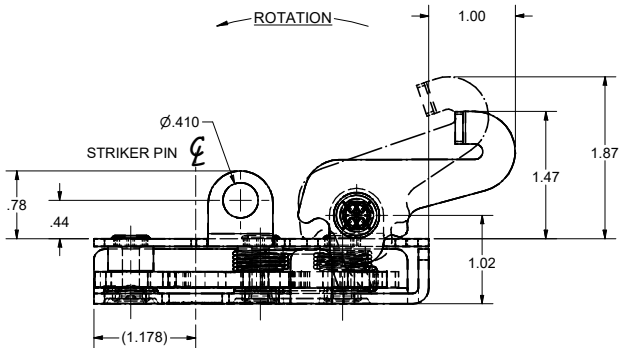
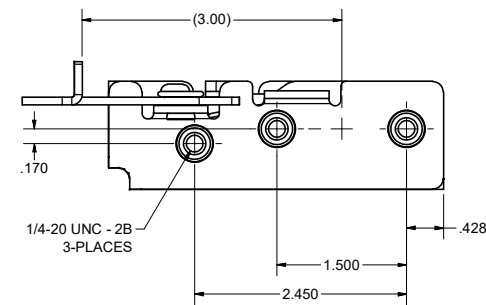


CONFIDENTIAL NOTICE: This drawing and the designs, specifications and engineering information disclosed herein are the property of Eberhard Manufacturing Company and are not to be disseminated or reproduced without express written consent. The drawing is loaned in confidence and then only for consideration of the matter disclosed herein. In accepting loan of this drawing, recipient agrees to keep it and the matter disclosed herein in confidence and not to use nor permit their use in any way detrimental to Eberhard Manufacturing Company, Division of the Eastern Company, 2384 Drake Road, Cleveland, Ohio 44149-9712. © 2019 EBERHARD MFG. CO.

REVISION HISTORY		EN	DATE	REV BY	APVD BY
REV	DESCRIPTION				
1	RELEASED FOR PRODUCTION REF PP12630-E, WAS 2C-M12630-RL	5905	5/3/2019	KAB	AK

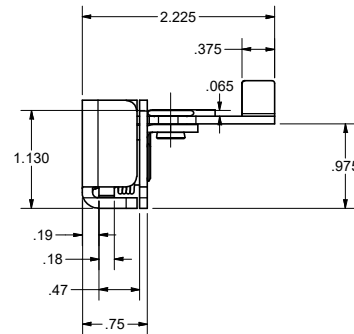

16T-475-L, LEFT HAND
LOW PROFILE ROTARY LOCK ASSEMBLY
AND THREADED SPACERS

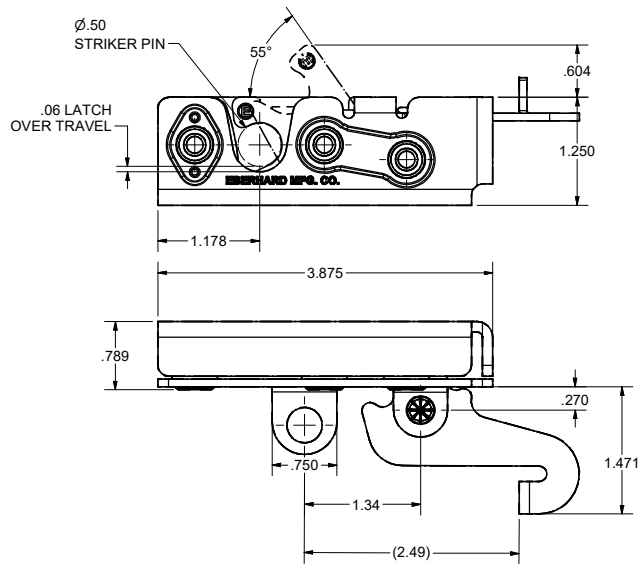

- NOTES:
- THIS ROTARY LOCK ASSEMBLY MEETS ALL REQUIREMENTS FOR FMVSS 206 SAFETY STANDARD WHEN MOUNTED WITH THREE 1/4-20 UNC-2A, GRADE 8 BOLTS.
 - RECOMMENDED TORQUE FOR TIGHTENING: 105 ±10 in./lbs.
 - SPRING RATE:
LATCH: 1.07 LBS*IN - UNLATCHED POSITION
PAWL: 1.03 LBS*IN - ACTUATED POSITION
 - AVAILABLE EBERHARD FINISHES:
- YELLOW ZINC WITH EVERLUBE INTERNAL COMPONENTS, FC (64)

CUSTOMER PRINT
SHEET 1 OF 2
RIGHT HAND SHOWN
LEFT HAND OPPOSITE



THIS DOCUMENT IS IN ACCORDANCE WITH ASME Y14.5-2018		DATE		REV	
UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE AS FOLLOWS:		5/3/2019		KAB	
ANGLES:		1°	1°		
2 PLACE DEC:		0.5	0.14		
3 PLACE DEC:		0.15	0.38		
ALL UNLESS OTHERWISE SPECIFIED					
THIS LOCK ASSEMBLY MEETS ALL FMVSS 206 SAFETY STANDARDS WHEN USED AND TESTED WITH AN EBERHARD CERTIFIED STRIKER					
Eberhard Manufacturing Co. DIVISION OF THE EASTERN COMPANY CLEVELAND, OHIO 44149-9712		DATE		REV	
16T-475-L		5/3/2019		KAB	
LOW PROFILE ROTARY LOCK ASSEMBLY W/ 1/4-20 THREADED SPACERS & SPECIAL LEVER ARM		DATE		REV	
16T-475-L		5/3/2019		KAB	

C:\TEMP\44162b7-6893-4e46-bb55-c7f602a0b0ff\Pro4475\16T-475-RL SH1.dwg