
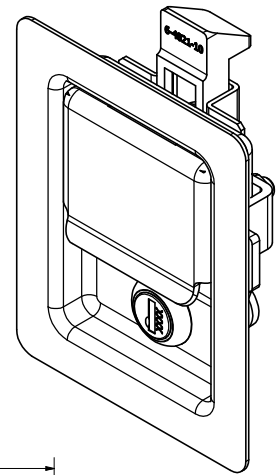
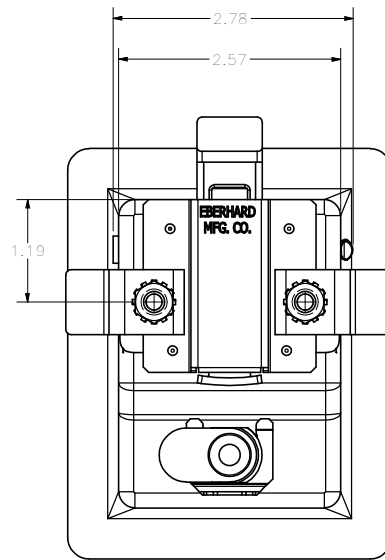
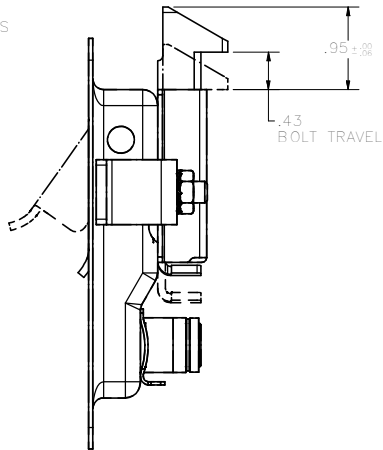
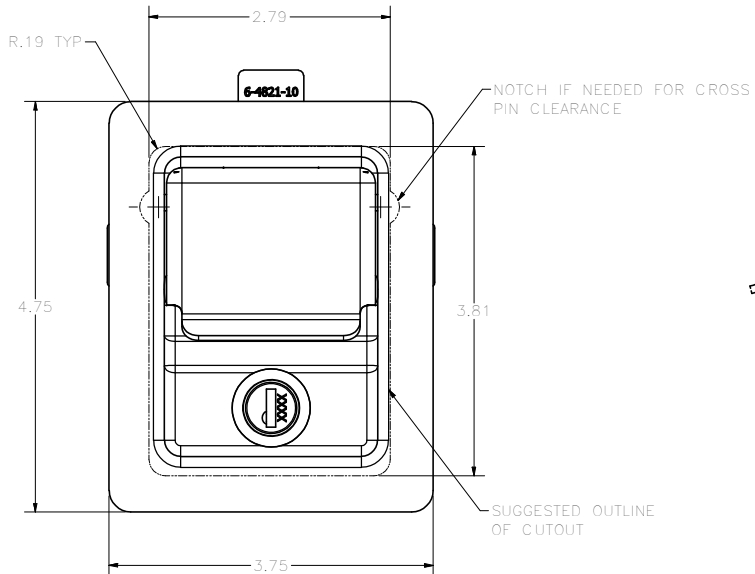


CONFIDENTIAL NOTICE: This drawing and the designs, specifications and engineering information disclosed hereon are the property of Eberhard Manufacturing Company and are not to be disseminated or reproduced without express written consent. The drawing is loaned in confidence and then only for consideration of the matter disclosed hereon. In accepting loan of this drawing, recipient agrees to keep it and the matter disclosed hereon in confidence and not to use nor permit their use in any way detrimental to Eberhard Manufacturing Company, Division of the Eastern Company, 2184 Drake Road, Cleveland, Ohio 44149-9712. © 2013 EBERHARD MFG. CO.

REVISION HISTORY			
REV	DESCRIPTION	BY	DATE
1	RELEASE WAS M10623-SSU	9608	08/14/2013

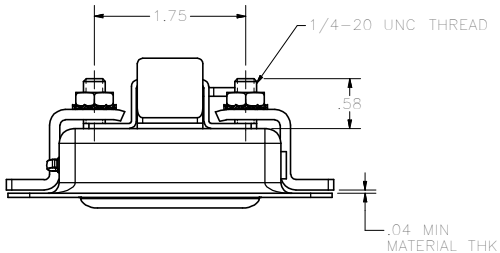

NOTES:  
FINISH: (10) BRIGHT POLISHED STAINLESS  
MAX. TORQUE FOR TIGHTENING THREADED WELD STUDS IS 55 IN.-LBS.  
MOUNTING HARDWARE SHIPPED LOOSE.  
BOLT SPRING 3.1 lb/in

SHOWN IN  
UNLOCKED POSITION

THIS DOCUMENT IS AN ALUMINUM PART UNLESS OTHERWISE SPECIFIED TOLERANCES ARE AS FOLLOWS:			
ANGLES:	0.0	0.0	0.0
2 PLACE DEC:	0.03	0.14	0.14
3 PLACE DEC:	0.015	0.34	0.34
ALL DIMENSIONS:	0.004	0.14	0.14
DATE:	01/12/2013	BY:	CLB
DATE:	01/12/2013	BY:	FULL
DATE:	01/12/2013	BY:	CLB
PADDLE TYPE RECESSED DOOR LOCK WITH MOUNTING BRACKETS			
31-4821-SSU			

CUSTOMER PRINT  
SHEET 1 OF 2

EBERHARD MANUFACTURING CO.  
DIVISION OF  
THE EASTERN COMPANY  
CLEVELAND, OHIO 44149-9712

C:\Working\_Folder\Archive\Pro\44820\_21\_22\31-4821-SSU SH1.dwg