




CONFIDENTIAL NOTICE: This drawing and the designs, specifications and engineering information disclosed hereon are the property of Eberhard Manufacturing Company and are not to be disseminated or reproduced without express written consent. The drawing is loaned in confidence and then only for consideration of the matter disclosed hereon. In accepting loan of this drawing, recipient agrees to keep it and the matter disclosed hereon in confidence and not to use nor permit their use in any way detrimental to Eberhard Manufacturing Company, Division of the Eastern Company, 21944 Drake Road, Cleveland, Ohio 44149-9712 © 2012 EBERHARD MFG. CO.

REVISION HISTORY			
REV	DESCRIPTION	EN	DATE
1	REVISED, REDRAWN AND CONVERTED TO 3D	5569	8-31-12

NOTE:
FOR ASSEMBLING, ESCUTCHEON AND RETAINING WASHER MUST BE PLACED ON SHANK AS SHOWN. SPOTWELD WASHER TO SHANK IN TWO PLACES ALLOWING ENOUGH CLEARANCE FOR ESCUTCHEON TO TURN.

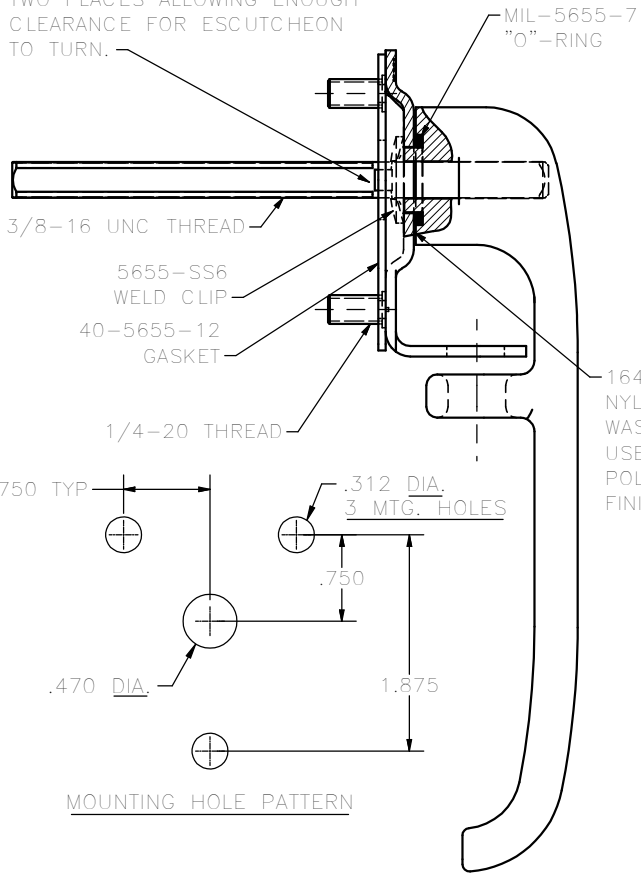

16483 NYLATRON WASHER- TO BE USED ONLY ON POLISHED (10) FINISH HANDLES

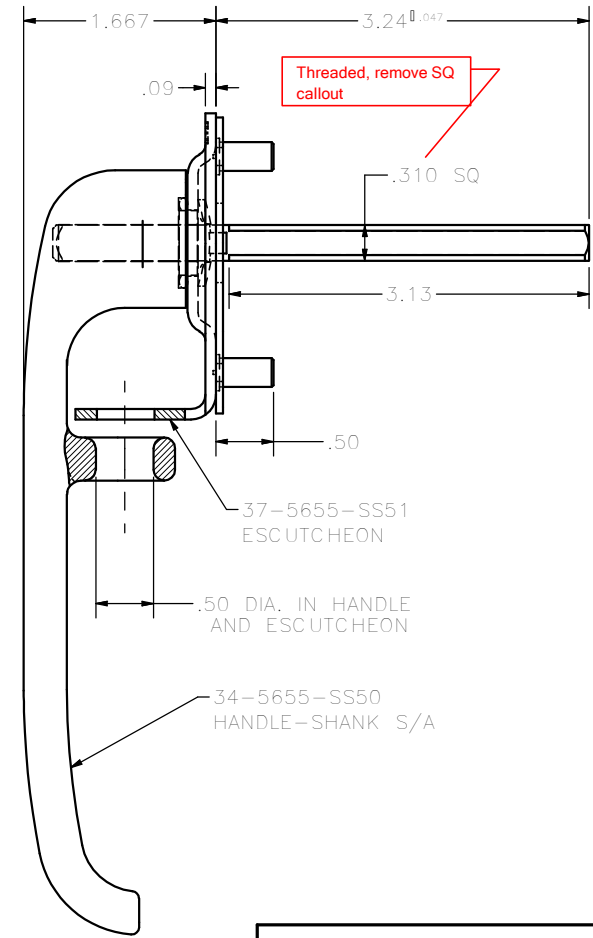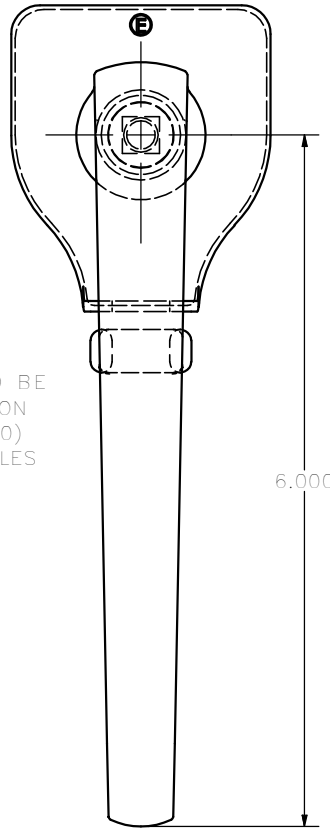

- NOTES:
1. MAX. FASTENING TORQUE: 75 IN./LBS.
2. FINISHES:
A. POLISHED STAINLESS, FC (10)
B. UNPOLISHED STAINLESS, FC (22)

SUPERSEDES DRAWING 48-5655-SSX DATED 2-7-92

THIS DOCUMENT IS IN ACCORDANCE WITH ASME Y14.15-2009		DATE 8/16/2012
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE AS FOLLOWS:		DESIGNER FLP
ANGLES:	0 ±0 0 ±0	SCALE FULL
2 PLACE DEC.:	0 .03 0 .76	CHECKER CHK.BY
3 PLACE DEC.:	0 .015 0 .38	
ALL HOLES:	0 .015 0 .31	

EBERHARD MANUFACTURING CO. DIVISION OF THE EASTERN COMPANY CLEVELAND, OHIO 44149-9712	
NAME	PADLOCK TYPE DROP HANDLE ASSEMBLY
MATERIAL	48-5655-SSX