


CONFIDENTIAL NOTICE: This drawing and the designs, specifications, and engineering information herein are the property of Eberhard Manufacturing Company and are not to be disseminated or reproduced without express written consent. This drawing is loaned in confidence and then only for the consideration of the matter disclosed herein. In accepting loan of this drawing, recipient agrees to keep it and the matter disclosed hereon in confidence and not to use or permit their use in any way detrimental to Eberhard Manufacturing Company, Division of The Eastern Company, 21944 Drake Road, Cleveland, Ohio, 44149-9712 © 2021 EBERHARD MFG. CO.

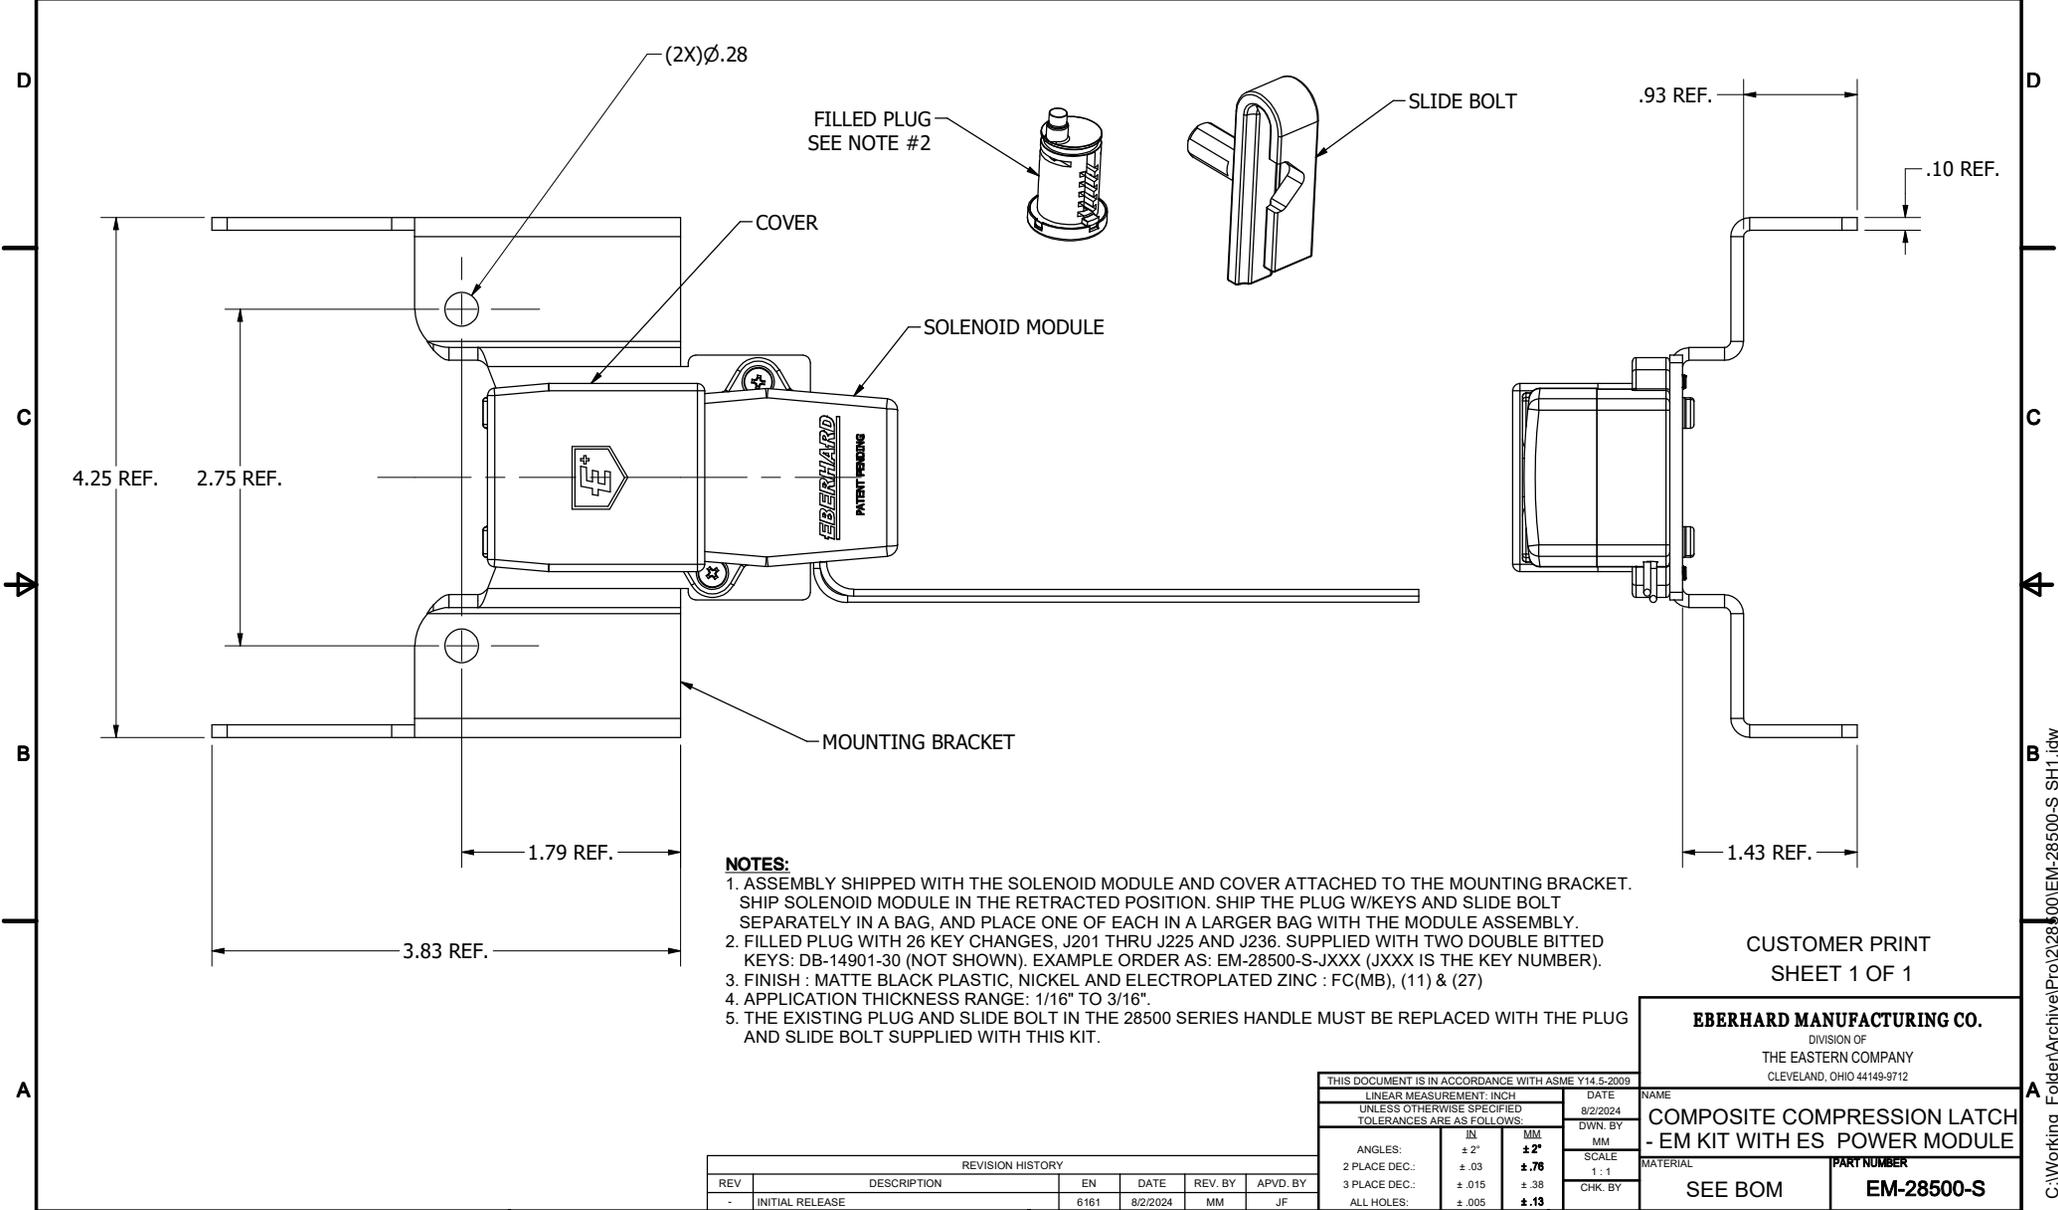

NOTES:

1. ASSEMBLY SHIPPED WITH THE SOLENOID MODULE AND COVER ATTACHED TO THE MOUNTING BRACKET. SHIP SOLENOID MODULE IN THE RETRACTED POSITION. SHIP THE PLUG W/KEYS AND SLIDE BOLT SEPARATELY IN A BAG, AND PLACE ONE OF EACH IN A LARGER BAG WITH THE MODULE ASSEMBLY.
2. FILLED PLUG WITH 26 KEY CHANGES, J201 THRU J225 AND J236. SUPPLIED WITH TWO DOUBLE BITTED KEYS: DB-14901-30 (NOT SHOWN). EXAMPLE ORDER AS: EM-28500-S-JXXX (JXXX IS THE KEY NUMBER).
3. FINISH : MATTE BLACK PLASTIC, NICKEL AND ELECTROPLATED ZINC : FC(MB), (11) & (27)
4. APPLICATION THICKNESS RANGE: 1/16" TO 3/16"
5. THE EXISTING PLUG AND SLIDE BOLT IN THE 28500 SERIES HANDLE MUST BE REPLACED WITH THE PLUG AND SLIDE BOLT SUPPLIED WITH THIS KIT.

CUSTOMER PRINT
SHEET 1 OF 1

EBERHARD MANUFACTURING CO.
DIVISION OF
THE EASTERN COMPANY
CLEVELAND, OHIO 44149-9712

THIS DOCUMENT IS IN ACCORDANCE WITH ASME Y14.5-2009		NAME	
LINEAR MEASUREMENT- INCH		DATE	
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE AS FOLLOWS:		8/2/2024	
ANGLES:	± 2°	MM	DWN. BY
2 PLACE DEC.:	± .03	MM	SCALE
3 PLACE DEC.:	± .015	MM	1 : 1
ALL HOLES:	± .005	MM	CHK. BY
		MATERIAL	
		PART NUMBER	
SEE BOM		EM-28500-S	

REVISION HISTORY					
REV.	DESCRIPTION	EN	DATE	REV. BY	APVD. BY
-	INITIAL RELEASE	6161	8/2/2024	MM	JF

C:\Working_Folder\Archive\Pro\2128400\EM-28500-S SH1.idw