






REVISION HISTORY					
REV	DESCRIPTION	EN	DATE	REV. BY	APVD. BY
	RELEASE DRAWING	6162	8/09/2024	TM	MR
1	UPDATE PICTORIALY	6192	03/21/2025	TM	MR

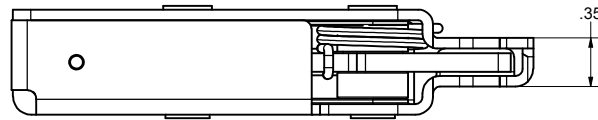

SCALE 1:1



SCALE 1:1

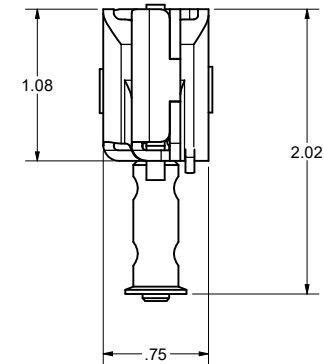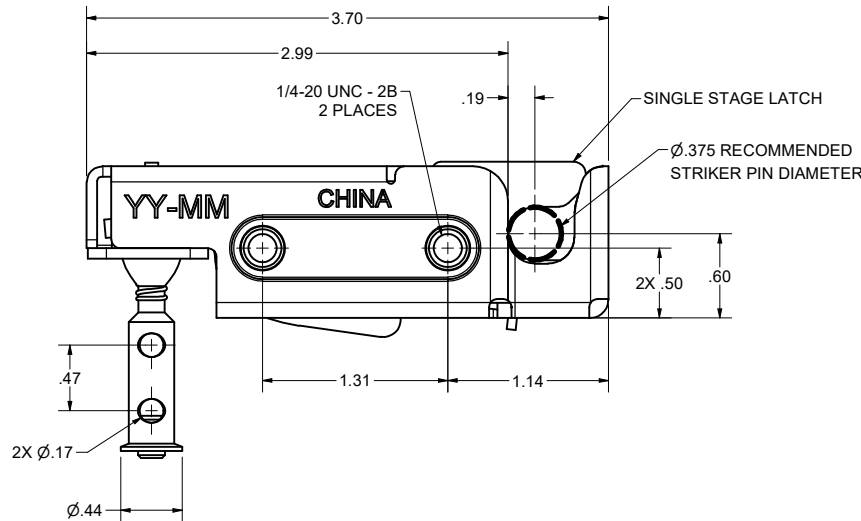

WARNING

THIS PRODUCT IS NOT CERTIFIED FOR FMVSS 206 OR PERSONAL RESTRAINT APPLICATIONS

NOTES:

- EBERHARD AVAILABLE FINISH: (DB) DORRLTECH (MAGNI 575 BLACK)
- USE 1/4-20 GRADE 8 BOLTS FOR INSTALLATION
RECOMMENDED TORQUE FOR TIGHTENING: 14 FT LBS

CUSTOMER PRINT

EBERHARD MANUFACTURING CO.

DIVISION OF
THE EASTERN COMPANY
CLEVELAND, OHIO 44149-9712

**ROTARY LATCH,
MULTI-DIRECTIONAL, BOTTOM PULL**

THIS DOCUMENT IS IN ACCORDANCE WITH ASME Y14.5-2009			
LINEAR MEASUREMENT - INCH		DATE	
UNLESS OTHERWISE SPECIFIED		8/9/2024	
TOLERANCES ARE AS FOLLOWS:		DWN. BY	
ANGLES:	± .2°	TM	SCALE
2 PLACE DEC.:	± .03	± .70	1.5:1
3 PLACE DEC.:	± .015	± .38	CHR. BY
ALL HOLES:	± .005	± .15	

PART NUMBER
LNL-77-00146