

i-LOCK BLUE i-BEAM CONTROLLER



i-Beam pairs with i-Lock Blue to transmit signal from vehicle door (or other device) to i-Lock Blue to activate devices that are connected to the outputs on i-Lock Blue.

SPECIFICATIONS

POWER SPECIFICATIONS

12VDC OPERATION: Constant power source such as vehicle/machine power

COMMUNICATION

2.4 GHz RF BLUETOOTH® 4.0:

Wirelessly connects to other i-Lock accessories; i-Lock Blue

i-LOCK BLUE APP: iOS; Android OS

OUTPUTS

SENDS BLUETOOTH® ACTIVATION SIGNAL TO CONNECTED i-LOCK DEVICES

INPUTS

READS SIGNAL FROM OEM KEY FOB ACTIVATION

LOCK/UNLOCK:

Unlock signal from door actuator;
lock signal from door actuator

ENVIRONMENTAL SPECIFICATIONS


OPERATING TEMPERATURE RANGE:

-20°C to 80°C ~95% RH

CERTIFICATIONS

RoHS

PART #
EBX800-011

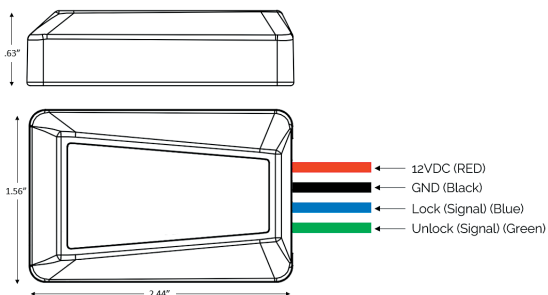

i-LOCK BLUE SERIES APP



Control the i-Lock Blue family of products only by Eberhard®

i-Lock Blue 2.0

- Available on the App Store
- Google Play - Coming Soon



FEATURES

- All new user interface
- Control more wired devices on i-Lock Blue controllers
- Personalize names for your devices or controllers
- Add multiple i-Lock controllers and/or devices to your app
- Enhanced security
- Control the new EM Rotary Latch
- Allows for a push button input to release multiple devices with a single click
- App branding: Allows for other manufacturers to brand the app utilizing the i-Lock technology